



FEATURES

- Capacity for pulling vacuum to less than 1 mbar!
- Highly portable, with forklift fittings for easy loading
- Onboard scales
- Single phase power source for convenience onsite
- Simple DIY servicing and replacement of filters
- High compression liquid storage
- Up to 60kg/hour capacity
- Integrates with and supported by PBA's fitting/filling kit, mass flow meter and SF6 database

The small, clever and powerful SF6 Gas Cart. PBA's EcoGas 600G SF6 Gas Cart is the most compact, portable and versatile option available when you need to meet and exceed stringent legislation and specifications covering SF6 management.


Technical Data

Description	Manual SF6 Service Cart
Application	Optimised Degassing Solution for equipment containing < 100 Kg of SF6

Features

Compressor	Single Compressor
------------	-------------------

EcoGas 600G-C Gas Cart Performance @ 25 °C

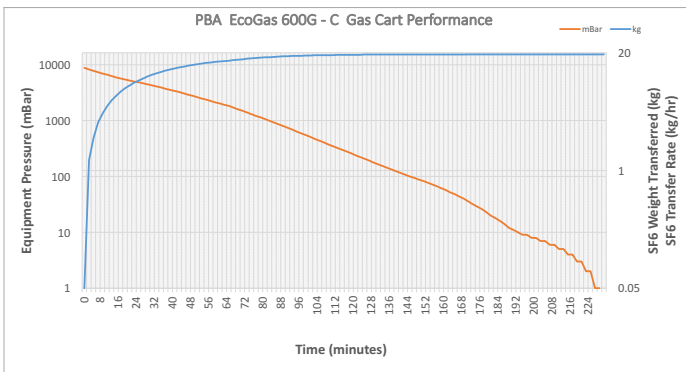

Operating Parameters

Residual Gas Pressure Following Extraction	1 mbar
Discharge Pressure	30 bar
Gas Volume Capability	Typically 11 litres /min 220 kV CB - Live Tank - 90 min
On Board Storage	Standard
On Board Bottle Scales	Standard
User Serviceable Filter	Filters to 0.1 microns
Operating Ambient Temperature	540 °C
Power Requirements	220/240V 50 Hz < 2 kW
Dimensions	1.2 x 1 x 1 metres
Weight	250 kg